





TRIMET BUILDING PRODUCTS INC.


TRI-LOCK MECH ROOFING PANEL

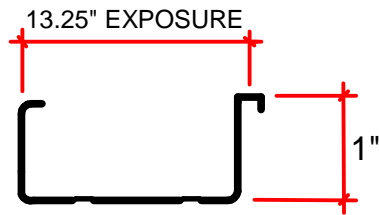


TRI-LOCK 1" MECH

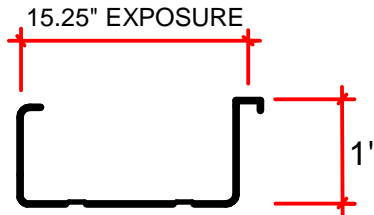


TRI-LOCK 1" MECH

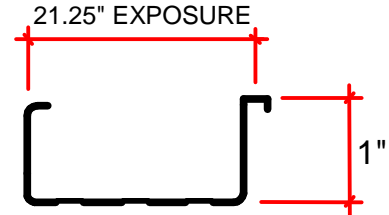


TRI-LOCK 1" MECH

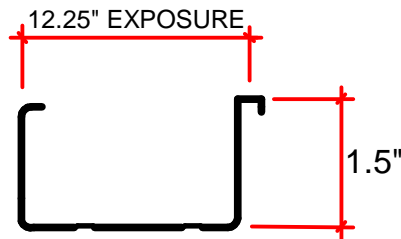

TRI-LOCK 1.5" MECH

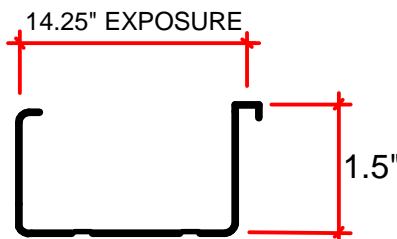

TRI-LOCK 1.5" MECH

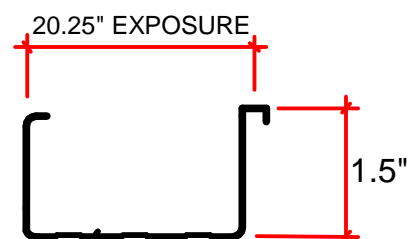

TRI-LOCK 1.5" MECH

Note: Available in 26 ga, 24 ga, and 22 ga
Available in Galv./ Galvalume, and All Available Colours

Applications

- Recommended ROOF installation over a solid substrate with;
 - a min. 30lb felt
 - or 30lb equivalent synthetic underlayment
 - or a metal compatible peel and stick membrane.

****Note: Check the Manufacture's Underlayment Specifications to Ensure Compatibility with Metal****

- Minimum ROOF Slope 3/12 or Greater for 1" High Rib
- Minimum ROOF Slope 2/12 or Greater for 1.5" High Rib

Accessories

- | | |
|---|---|
| <ul style="list-style-type: none"> • Expansion Clips 1" and 1.5" • Fixed Clips 1" and 1.5" • Universal Vented Flex-O-Vent Closure - 3"x10' Rolls • Butyl Tape – Available in 30' and 45' Rolls • Emseal Universal 1" Foam Closure – 19.68' / roll • Emseal Universal 1.5" Foam Closure – 13.12' / roll • Titebond Metal Roof Sealant | <ul style="list-style-type: none"> • Masterflash Available Upon Request • #14 – 1 ¼" Wood Grip Screws Available in Painted and Non-Painted • #14 – 7/8" Stitch Screws Available in Painted and Non-Painted • #10 Low Profile Screws Available |
|---|---|



INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES