






TRI-LOCK MECH ROOFING PANEL

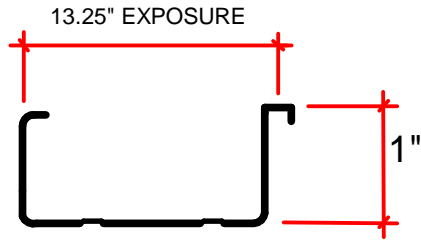


TRI-LOCK 1" MECH

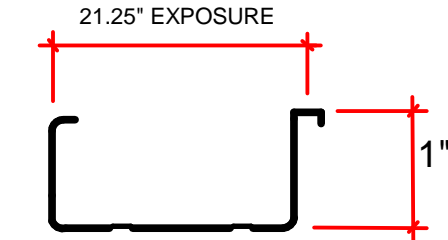

TRI-LOCK 1" MECH

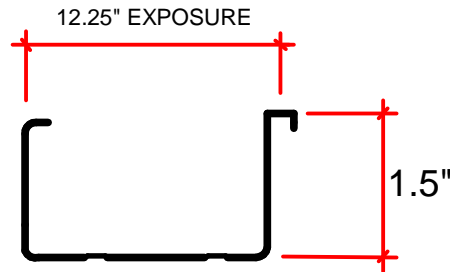

TRI-LOCK 1.5" MECH

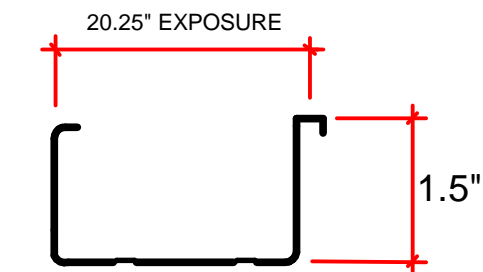

TRI-LOCK 1.5" MECH

Note: **Available** in **26 ga, 24 ga,** and **22 ga (Limited Colours)**

Available in **Galv./ Galvalume**, Call Sales Associate for **Available Colours**

Applications

- Recommended ROOF installation over a solid substrate with a min. 30lb felt, Synthetic Underlayment or a Peel and Stick Membrane.
- **Minimum ROOF Slope 3/12 or Greater for 1" High Rib.**
- **Minimum ROOF Slope 2/12 or Greater for 1.5" High Rib.**

Accessories

- Expansion Clips 1" and 1.5"
- Butyl Tape – Available in 30' and 45' Rolls
- Emseal Universal 1" Foam Closure – 19.68' / roll
- Emseal Universal 1.5" Foam Closure – 13.12' / roll
- Universal Vented Flex-O-Vent Closure- 3"x10' Roll
- Masterflash Available Upon Request
- #14 – 1 ¼" Wood Grip Screws Available in Painted and Non-Painted
- #14 – 7/8" Stitch Screws Available in Painted and Non-Painted
- #10 Low Profile Screws Available



INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES