

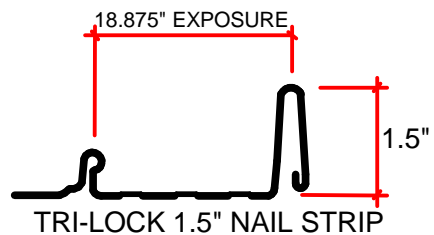
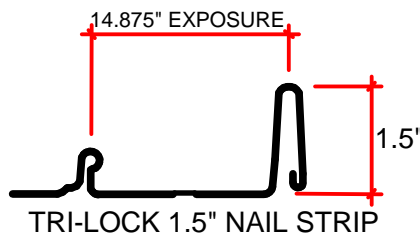
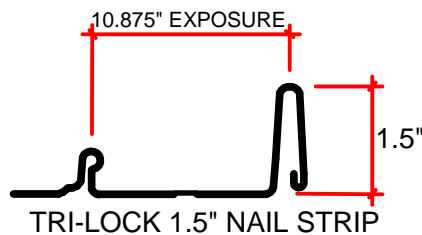
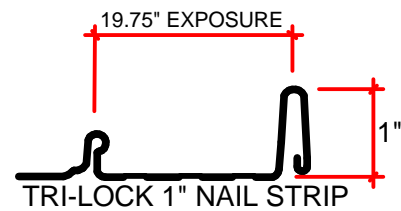


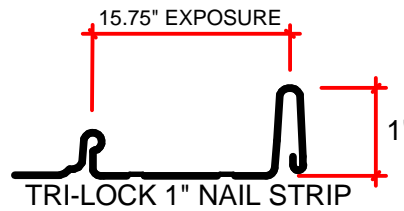

# TRIMET BUILDING PRODUCTS INC.

## TRI-LOCK NAIL STRIP ROOFING PANEL

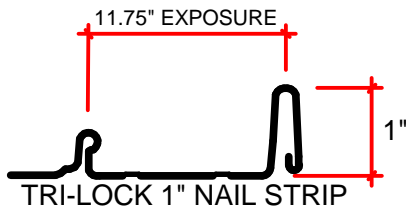

Note: Available in 26 ga, and 24 ga  
Available in Galv./ Galvalume, and All Available Colours

### Applications

- Recommended ROOF installation over a solid substrate with;
  - a min. 30lb felt
  - or 30lb equivalent synthetic underlayment
  - or a metal compatible peel and stick membrane.

**\*\*Note: Check the Manufacturer's Underlayment Specifications to Ensure Compatibility with Metal\*\***

- Minimum ROOF Slope 3/12 or Greater for 1" High Rib
- Minimum ROOF Slope 2/12 or Greater for 1.5" High Rib

### Accessories

- Large Foam Closure 36" (used with 11.75" and 15.75" panel)
- Vented LP2 Foam Closure 36" (used with 11.75" and 15.75" panel)
- Universal Vented Flex-O-Vent Closure - 3"x10' Rolls
- Butyl Tape - Available in 30' and 45' Rolls
- Emseal Universal 1" Foam Closure - 19.68' / roll
- Emseal Universal 1.5" Foam Closure - 13.12' / roll
- Masterflash Available Upon Request
- #14 - 1 1/4" Wood Grip Screws Available in Painted and Non-Painted
- #14 - 7/8" Stitch Screws Available in Painted and Non-Painted
- #10 & #8 Low Profile Screws Available
- Titebond Metal Roof Sealant



\*INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES\*