

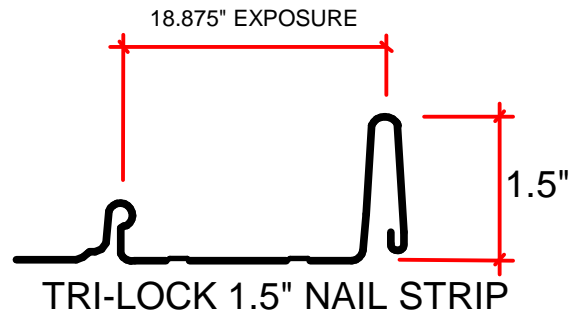
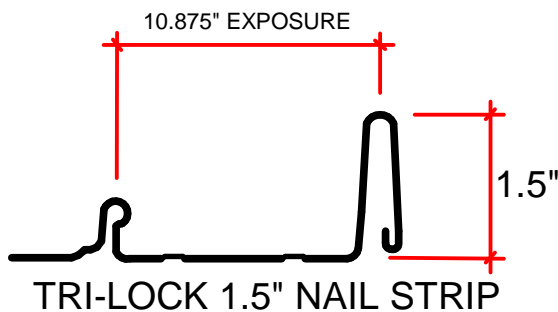


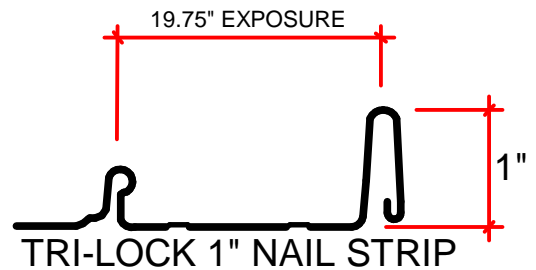

# TRIMET BUILDING PRODUCTS INC.

## TRI-LOCK NAIL STRIP ROOFING PANEL

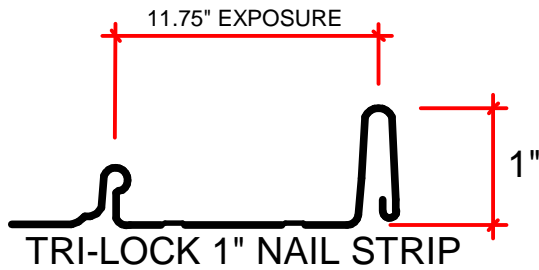

Note: **Available** in **26 ga**, and **24 ga**

Available in **Galv./ Galvalume**, Call Sales Associate for **Available Colours**

### ***Applications***

- Recommended ROOF installation over a solid substrate with a min. 30lb felt, Synthetic Underlayment or a Peel and Stick Membrane.  
**Minimum ROOF Slope 3/12 or Greater for 1" High Rib.**  
**Minimum ROOF Slope 2/12 or Greater for 1.5" High Rib.**

### ***Accessories***

- Large Foam Closure 36" (used with 11.75" panel)
- Vented LP2 Foam Closure 36" (used with 11.75" panel)
- Universal Vented Flex-O-Vent Closure - 3"x10' Rolls
  
- Butyl Tape – Available in 30' and 45' Rolls
- Emseal Universal 1" Foam Closure – 19.68' / roll
- Emseal Universal 1.5" Foam Closure – 13.12' / roll
  
- Masterflash Available Upon Request
  
- #14 – 1 ¼" Wood Grip Screws Available in Painted and Non-Painted
- #14 – 7/8" Stitch Screws Available in Painted and Non-Painted
- #10 & #8 Low Profile Screws Available



\*INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES\*