





# TRIMET BUILDING PRODUCTS INC.


## TRI-LOCK SNAP SEAM ROOFING PANEL

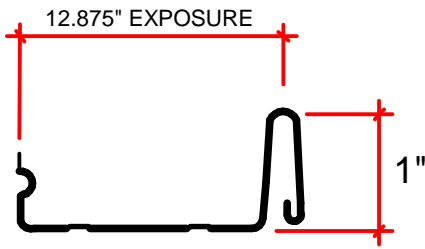


TRI-LOCK 1" SNAP SEAM

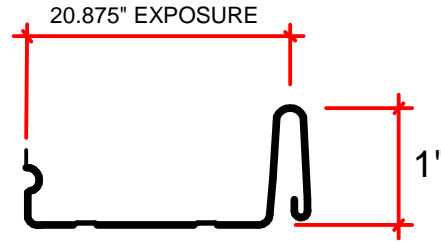

TRI-LOCK 1" SNAP SEAM

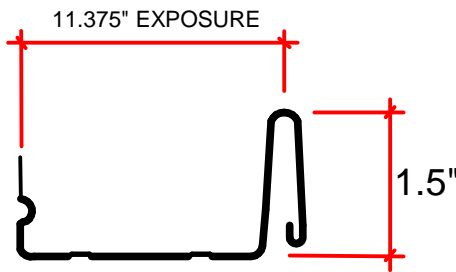

TRI-LOCK 1.5" SNAP SEAM

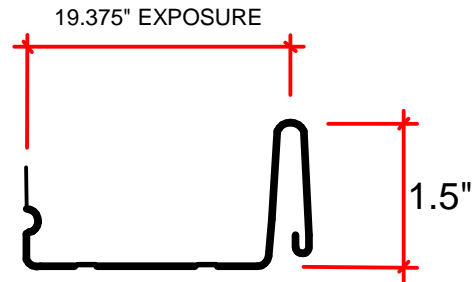

TRI-LOCK 1.5" SNAP SEAM

Note: **Available** in **26 ga**, and **24 ga**

Available in **Galv./ Galvalume**, Call Sales Associate for **Available Colours**

### ***Applications***

- Recommended ROOF installation over a solid substrate with a min. 30lb felt, Synthetic Underlayment or a Peel and Stick Membrane.  
**Minimum ROOF Slope 3/12 or Greater for 1" High Rib.**  
**Minimum ROOF Slope 2/12 or Greater for 1.5" High Rib.**

### ***Accessories***

- Floating Clips 1" and 1.5"
- Butyl Tape – Available in 30' and 45' Rolls
- Emseal Universal 1" Foam Closure – 19.68' / roll
- Emseal Universal 1.5" Foam Closure – 13.12' / roll
- Universal Vented Flex-O-Vent Closure- 3"x10' Roll
- Masterflash Available Upon Request
- #14 – 1 ¼" Wood Grip Screws Available in Painted and Non-Painted
- #14 – 7/8" Stitch Screws Available in Painted and Non-Painted
- #10 Low Profile Screws Available



\*INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES\*