




**TRIMET**  
**BUILDING PRODUCTS INC.**

## TRIMET CORRUGATED PROFILE

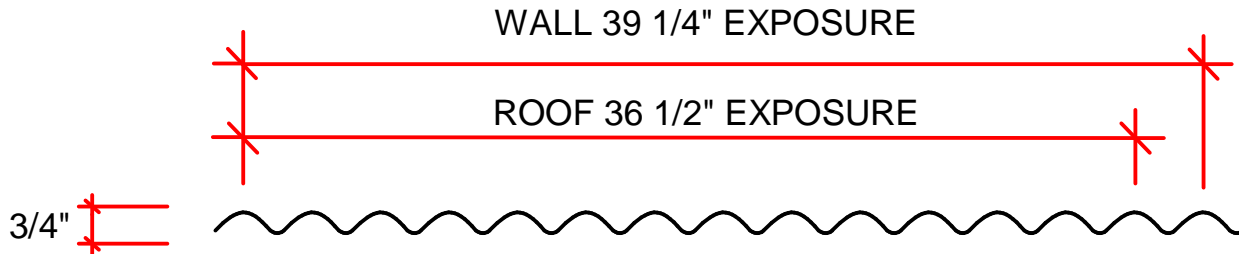

**Note:** Available in 26 ga, 24 ga, and 22ga  
30ga Available for Liner Panels  
Available in Galv./ Galvalume, and All Available Colours

### Applications

- Used for both ROOF and WALL applications
- Recommended ROOF installation over a solid substrate with;
  - a min. 30lb felt
  - or 30lb equivalent synthetic underlayment
  - or a metal compatible peel and stick membrane.

**\*\*Note: Check the Manufacturer's Underlayment Specifications to Ensure Compatibility with Metal\*\***

- Minimum ROOF Slope 3/12 or Greater.

### Accessories

- Large Foam Closure 26.67"
  - Butyl Tape
    - 1/8" x 3/4" x 30' Roll
    - 3/32" x 3/8" x 45' Roll
    - 3/32" x 1/2" x 45' Roll
    - 3/32" x 3/4" 45' Roll
    - 3/32" x 1" x 45' Roll
  - Emseal Universal 1" Foam Closure – 19.68' / Roll
    - Masterflash Available Upon Request
- #10 x 1 1/2" Wood Grip Screws, Available in Painted and Non-Painted
- #14 – 1 1/4" Wood Grip Screws, Available in Painted and Non-Painted
- #14 – 7/8" Stitch Screws, Available in Painted and Non-Painted
  - Titebond Metal Roof Sealant



\*INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES\*