




TRIMET
BUILDING PRODUCTS INC.

TRIMET DIAMOND RIB AND REVERSE DIAMOND RIB PROFILE

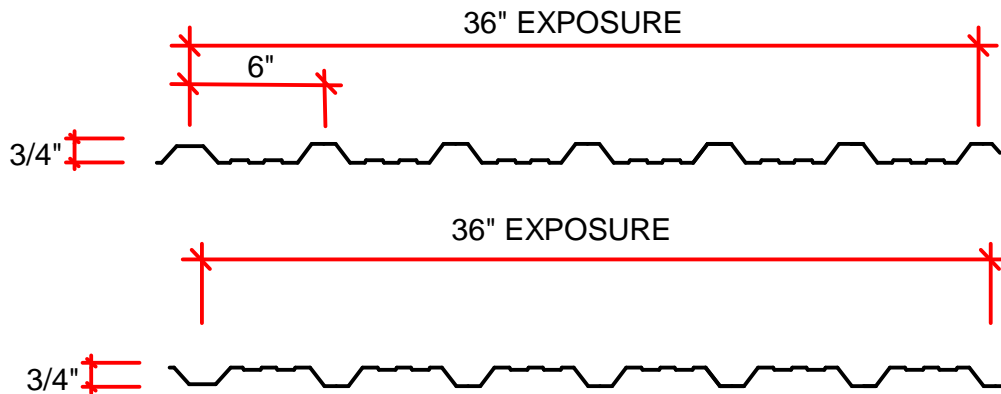

Note: Available in 26 ga, and 24 ga
30ga Available for Liner Panels
Available in Galv./ Galvalume, and All Available Colours

Applications

- Used for both ROOF and WALL applications
- Recommended ROOF installation over a solid substrate with;
 - a min. 30lb felt
 - or 30lb equivalent synthetic underlayment
 - or a metal compatible peel and stick membrane.
- ****Note: Check the Manufacturer's Underlayment Specifications to Ensure Compatibility with Metal****
- Minimum ROOF Slope 3/12 or Greater.

Accessories

- Butyl Tape
 - 1/8" x 3/4" x 30' Roll
 - 3/32" x 3/8" x 45' Roll
 - 3/32" x 1/2" x 45' Roll
 - 3/32" x 3/4" 45' Roll
 - 3/32" x 1" x 45' Roll
- Large and Small Foam Closure – 3' pc
- Large Vented LP2 Foam Closure – 3'pc
- Emseal Universal 1" Foam Closure –19.68' / Roll
- Flex-O-Vent Universal Vented Closure 10' Rolls. (2 Rolls/Box)
- Masterflash Available Upon Request
- #10 x 1 1/2" Wood Grip Screws, Available in Painted and Non-Painted
- #14 – 1 1/4" Wood Grip Screws, Available in Painted and Non-Painted
- #14 – 7/8" Stitch Screws, Available in Painted and Non-Painted
- Titebond Metal Roof Sealant



INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES