




TRIMET
BUILDING PRODUCTS INC.

TRIMET CORRUGATED PROFILE

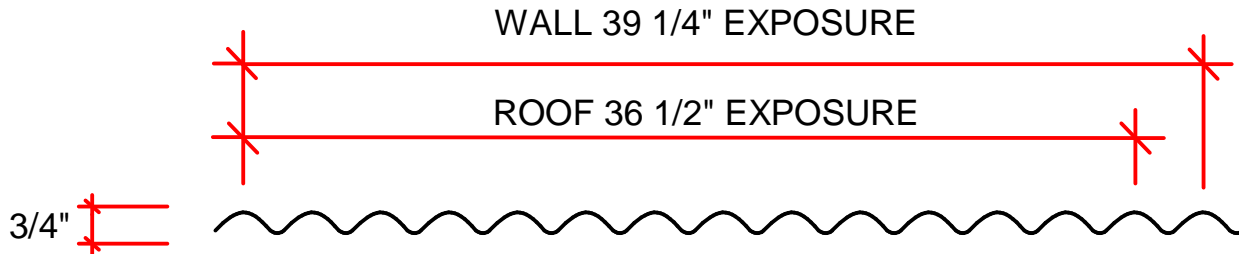

Note: **Available** in **30 ga**, **26 ga**, and **24 ga**
Available in **Galv./ Galvalume**, Call Sales Associate for **Available Colours**

Applications

- Used for both ROOF and WALL Applications
- Recommended ROOF installation over a solid substrate with a min. 30lb felt, Synthetic Underlayment or a Peel and Stick Membrane.
Minimum ROOF Slope 3/12 or Greater.

Accessories

- Feltex Roof Underlayment – 1000 sqft/roll
- Large Foam Closure 26.67"
- Butyl Tape – 30' roll
- Emseal Universal 1" Foam Closure – 19.68' / roll
- Masterflash Available Upon Request
- #14 – 1 1/4" Wood Grip Screws Available in Painted and Non-Painted
- #14 – 7/8" Stitch Screws Available in Painted and Non-Painted



INSTALL ALL ROOFING AND SIDING MATERIALS ACCORDING TO YOUR LOCAL BUILDING CODES